




Electrical Products
Let your need be our challenge

Dimensional Drawing – Startco CT’s
Type: EFCT6RF

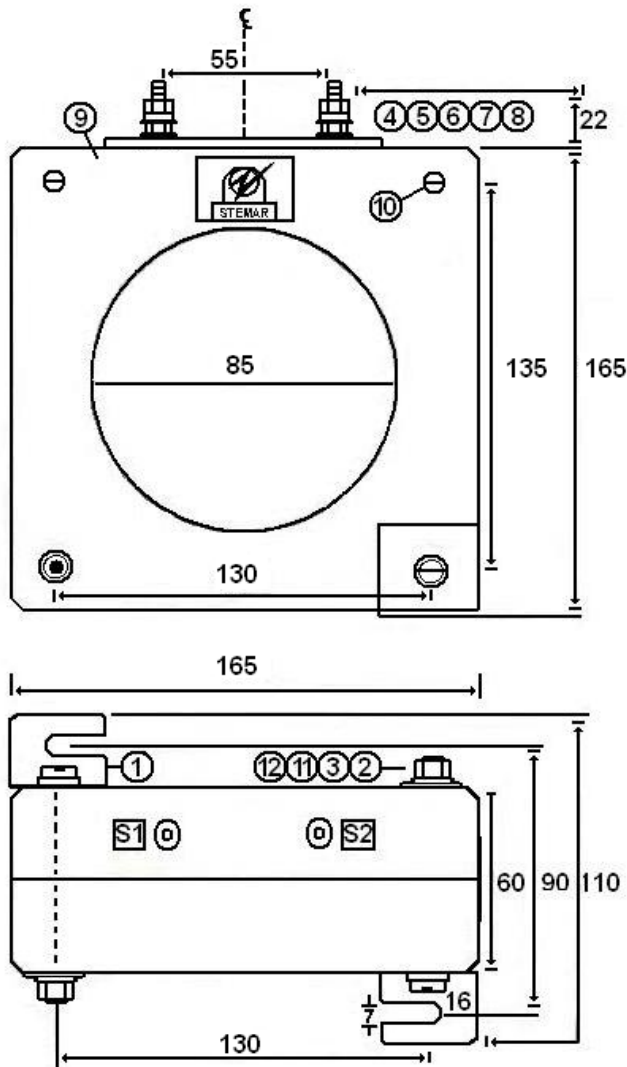

NOTE

- (1) 22- Maximum height of terminals
- (2) Items 1, 2, 3, 11 & 12 to be packed together and not fitted unless specified on W/O.

12	2	M4 Full Nuts Z/P
11	2	M4 Spring Washers S/S #304
10	4	32mm Flared Aluminum Rivets
9	2	DMC85 – 15mm Shells (Black)
8	2	M5 Full Nut N/P
7	2	M5 Spring Washer S/S #304
6	2	M5 Flat Lock Nut N/P
5	6	M5 Flat Washers N/P
4	2	M5 Termination Screws N/P 6-0235-A4
3	4	M4 Flat Washers Z/P
2	2	M4x70 Posidriv 1A Recess Hd MTS z/p
1	2	Steel Angle Foot Bracket Z/Ps 6-0236-A4
ITEM	QTY	DESCRIPTION

HOUSING: High Impact glass reinforced polyester
SYSTEM VOLTAGE: 1100 Volts
SYSTEM FREQUENCY: 50Hz
TEST VOLTAGE:
POWER FREQUENCY: 3Kv RMS for 1 minute
Ith: 60/100 times for 1 sec
INSULATION: Class E
SERVICE TEMPERATURE: -20c to 120c
STANDARDS TEMPERATURE: The EFCT range of Current Transformers complies with the following Standards
AS 1675:1986, AS 60044-1:2003 & IEC 60044-1:2003



Stemar Electrical Products Pty. Ltd.

ABN 13 067 330 269

243 Milperra Road
P.O. Box 538
Revesby NSW 2212
Australia

Telephone: (61 2) 9771 2100
Fax: (61 2) 9774 5585
Email: sales@stemar.com.au
Web: www.stemar.com.au

