




Electrical Products
Let your need be our challenge

Dimensional Drawing – Startco CT's
Type: MPU60
Ratio: 400/1 to 1000/1

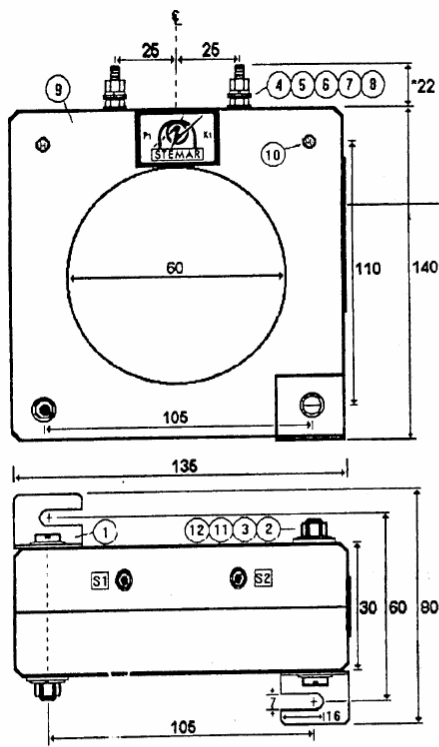

CURRENT TRANSFORMER 1: K=1000	
WVLY	LV CLASS
FREQ	RATIO
TYPE	BURDEN
SER No.	OUTPUT VA
MADE IN AUSTRALIA	

NOTE:
(1) * 22 - Maximum height of terminals.
(2) Items 1,2,3,11 & 12 to be packaged together and not fitted unless specified on w/c.

ITEM	QTY	DESCRIPTION
12	2	M4 Full Nuts Z/P
11	2	M4 Spring Washers S/S #304
10	4	32mm Flared Aluminium Rivets
9	2	DMC80 - 15mm Shells (Black)
8	2	M5 Full Nut N/P
7	2	M5 Spring Washer S/S #304
6	2	M5 Lock Nut N/P
5	6	M5 Flat Washers N/P
4	2	M5 Termination Screws N/P 6-0235-A4
3	4	M4 Flat Washers Z/P
2	2	M4x40 Posidriv 1A Recess Hd MTS z/p
1	2	Steel Angle Foot Bracket Z/Ps 6-0236-A4

HOUSING: High impact glass reinforced polyester

SYSTEM VOLTAGE: 1100 Volts

SYSTEM FREQUENCY: 50Hz

TEST VOLTAGE:

POWER FREQUENCY: 3kV RMS for 1 minute

I_{th} 60/100 times for 1 sec

INSULATION: Class E

SERVICE TEMPERATURE: -20c to 120c

STANDARDS TEMPERATURE: The MPU range of Current Transformers complies with the following Standards

AS 1675:1986 & AS 60044-1:2003

IEC 60044-1: 2003



Stemar Electrical Products Pty. Ltd.

ABN 13 067 330 269

77 Carrington Street
P.O. Box 538
Revesby NSW 2212
Australia

Telephone: (61 2) 9771 2100
Fax: (61 2) 9774 5585
Email: sales@stemar.com.au
Web: www.stemar.com.au

